
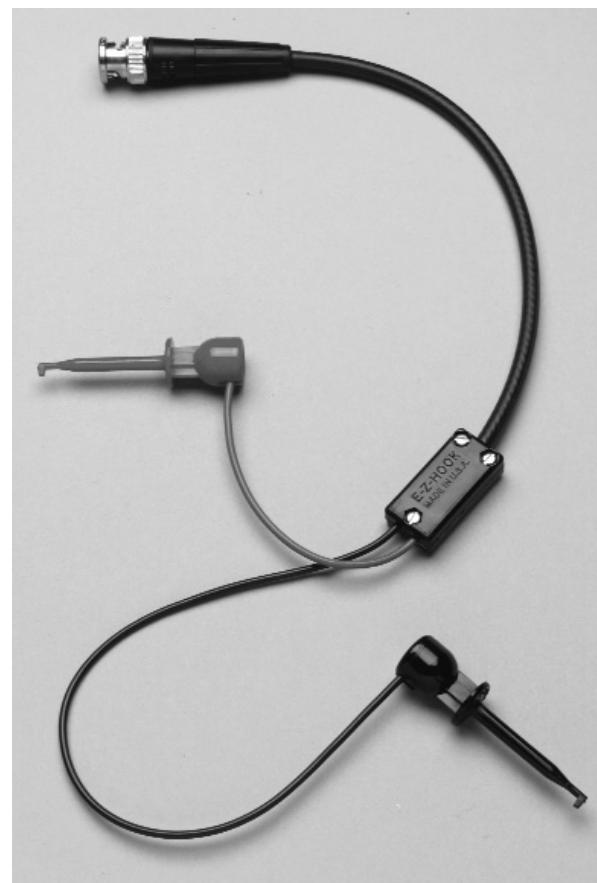


COAXIAL TEST CABLES

E-Z-Hook provides a variety of standard and custom cable assembly solutions used across multiple industries. We specialize in coaxial cable assemblies that utilize BNC, Double banana, TNC, N Series, UHF, SMA and LOC connectors. Superior construction and industry preferred test connectors make E-Z-Hook cables the first and only choice.

For E-Z-Hook cable accessories please refer to the accessories section beginning on page 106.

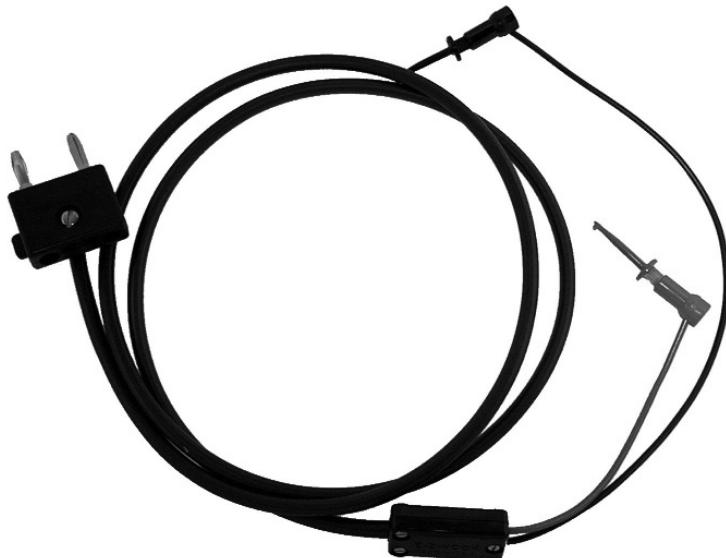

BNC COAXIAL TEST CABLES


BASIC INFORMATION

Male Connectors: Brass body and fittings, teflon insulators, silver or gold-plated brass contact, bright tarnish resistant metal alloy finish.


Female Connectors: Brass body and fittings, teflon insulators, silver or gold-plated beryllium copper contact, bright tarnish, resistant metal alloy finish.

Standard Lengths Available:

6"	15cm	30"	75cm
12"	30cm	36"	90cm
18"	45cm	48"	120cm
24"	60cm	60"	150cm



MALE




FEMALE

For ordering: (Part no.)-(length).
Please specify length in inches.


QUICK DISCONNECT BNC CABLE ASSEMBLY USES CONNECTOR P/N 8916 FOR RG58C/U CABLE ONLY

Part No.
1504 - (length)




BNC MALE WITH STRAIN RELIEF BOOT TO CABLE ONLY . . . NO INTERFACE

RG58C/U	RG174/U	RG59/U	RG62B/U	MIC
Part No.				
1222-(length)	4222-(length)	7522-(length)	6222-(length)	2222-(length)

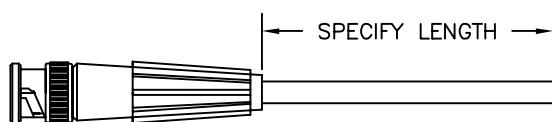


BNC MALE TO BNC MALE WITH STRAIN RELIEF BOOTS



RG58C/U	RG174/U	RG59/U	MIC			
Standard	Weatherproof	Standard	Weatherproof	Standard	Weatherproof	Std Only
1026	1726	4026	4726	7526	7726	2026


BNC COAXIAL TEST CABLES

BNC FEMALE TO BNC MALE WITH STRAIN RELIEF BOOTS




RG58C/U		RG174/U		RG59/U		MIC
Standard	Weatherproof	Standard	Weatherproof	Standard	Weatherproof	Std Only
1025	1725	4025	4725	7525	7725	2025

BNC FEMALE TO BNC FEMALE WITH STRAIN RELIEF BOOTS




RG58C/U		RG174/U		RG59/U		MIC
Standard	Weatherproof	Standard	Weatherproof	Standard	Weatherproof	Std Only
1024	1724	4024	4724	7524	7724	2024

RIGHT ANGLE BNC MALE TO RIGHT ANGLE BNC MALE
WITH STRAIN RELIEF BOOTS

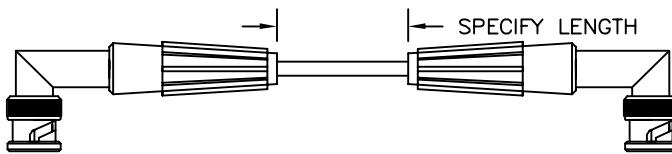


RIGHT ANGLE BNC MALE TO STRAIGHT BNC MALE
WITH STRAIN RELIEF BOOTS

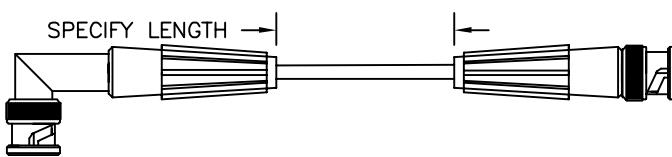

BNC MALE TO BNC MALE

CONVENTIONAL CONSTRUCTION Field Serviceable


RG58C/U	RG142B/U	RG174/U	RG316/U	RG62B/U	RG59/U
Part No.					
1046	1146	4046	4146	6246	7546



BNC MALE TO BNC FEMALE

CONVENTIONAL CONSTRUCTION Field Serviceable

RG58C/U	RG142B/U	RG62B/U	RG59/U
Part No.	Part No.	Part No.	Part No.
1045	1145	6245	7545



BNC MALE TO BNC MALE CRIMP CONSTRUCTION


RG58C/U	RG174/U	RG59/U	MIC
Part No.	Part No.	Part No.	Part No.
1426	4426	7426	2426



BNC MALE TO BNC MALE VIDEO BACK PANEL

PATCH CORDS

Part No.	Connector, both ends: BNC male 7026 - (length)
	Cable: Double shielded 75 Ohm video



BNC MALE TO LEAD ONLY VIDEO BACK PANEL
CABLES

Part No.	Connector, one end only: BNC male 7022 - (length)
	Cable: double shielded 75 Ohm video

