
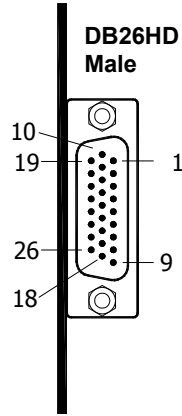


**BRKDD26HDM Rev B Datasheet**

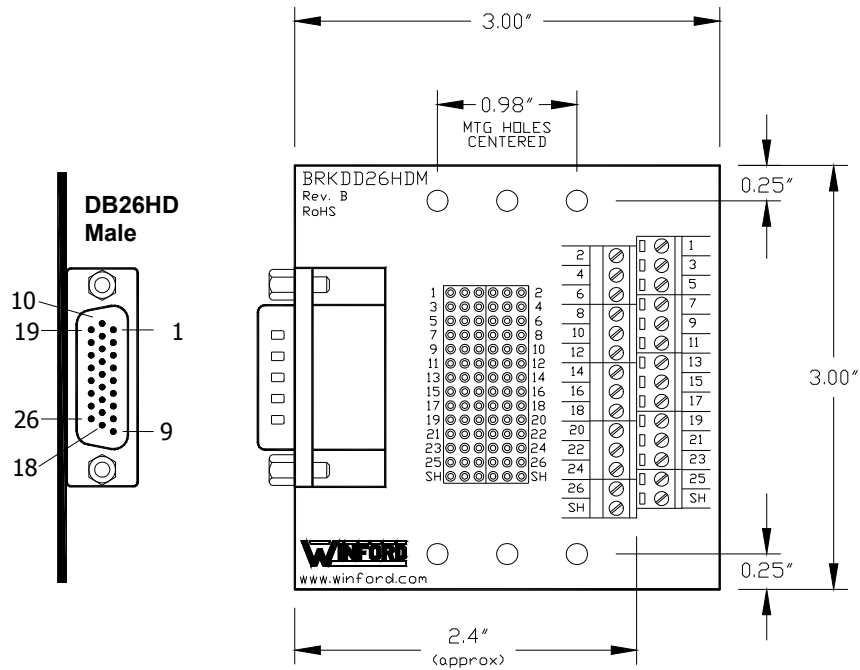

- MOUNTING HOLE, 0.15" DIA
- ⊙ SOLDER PAD W/ 0.04" DIA HOLE

## BRKDD26HDM Rev B Specifications

Ambient Temperature	-20°C to 85°C
Ambient Humidity	10% to 90% RH, non-condensing
Voltage	200V maximum between any two signals
Continuous Current	2.5A maximum on any signal
Screw Terminal Size	Accepts 16 - 26 AWG wire

## Part Number Ordering Information

BRKDD	26HD	M	-	R	-	
1	2	3		4		

### 1. Connector Positions

- **26HD** DB26 High Density (three-row)

### 2. Connector Gender


- **M** Male (Plug)

### 3. Connector Style

- **R** Right Angle

### 4. Mounting Option

- **FT** Rubber Feet on bottom side of PCB
- **DIN** DIN Rail Mounting Clips

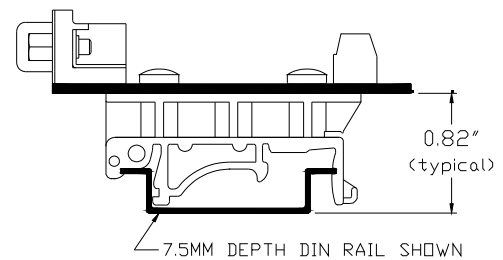

**DIN Clip Mounting  
Option**

## **BRKDD26HDM Stocked Part Numbers**

The following part numbers represent standard options and are stocked:

- BRKDD26HDM-R-FT
- BRKDD26HDM-R-DIN

For parts other than BRKDD26HDM-\*, please see the other datasheets for a list of stocked part numbers.

## **Changes**

Rev B

- Brought DB26HD Shield/Shell connection out to new solder pads and screw terminals
- Enlarged board by 0.1” (0.05” on each side)
- Shifted mounting holes / DIN clips by the same 0.05” on each side
- Larger silkscreen number labels by screw terminals

## **Notice**

Winford Engineering, LLC does not authorize any of its products for use in military, medical or other life-critical systems and/or devices. Life-critical devices/systems include devices or systems which, a) are intended for surgical implantation into the body, or b) support or sustain life and whose failure to perform can be reasonably expected to result in injury. Winford Engineering, LLC products are not designed with the components required, and are not subject to the testing required to ensure a level of reliability suitable for the treatment and diagnosis of people. Winford Engineering, LLC shall not be held responsible or liable for damages or injury that occur as a result of the use of this product.