


## BRKSD44HDMV2 Rev A Datasheet

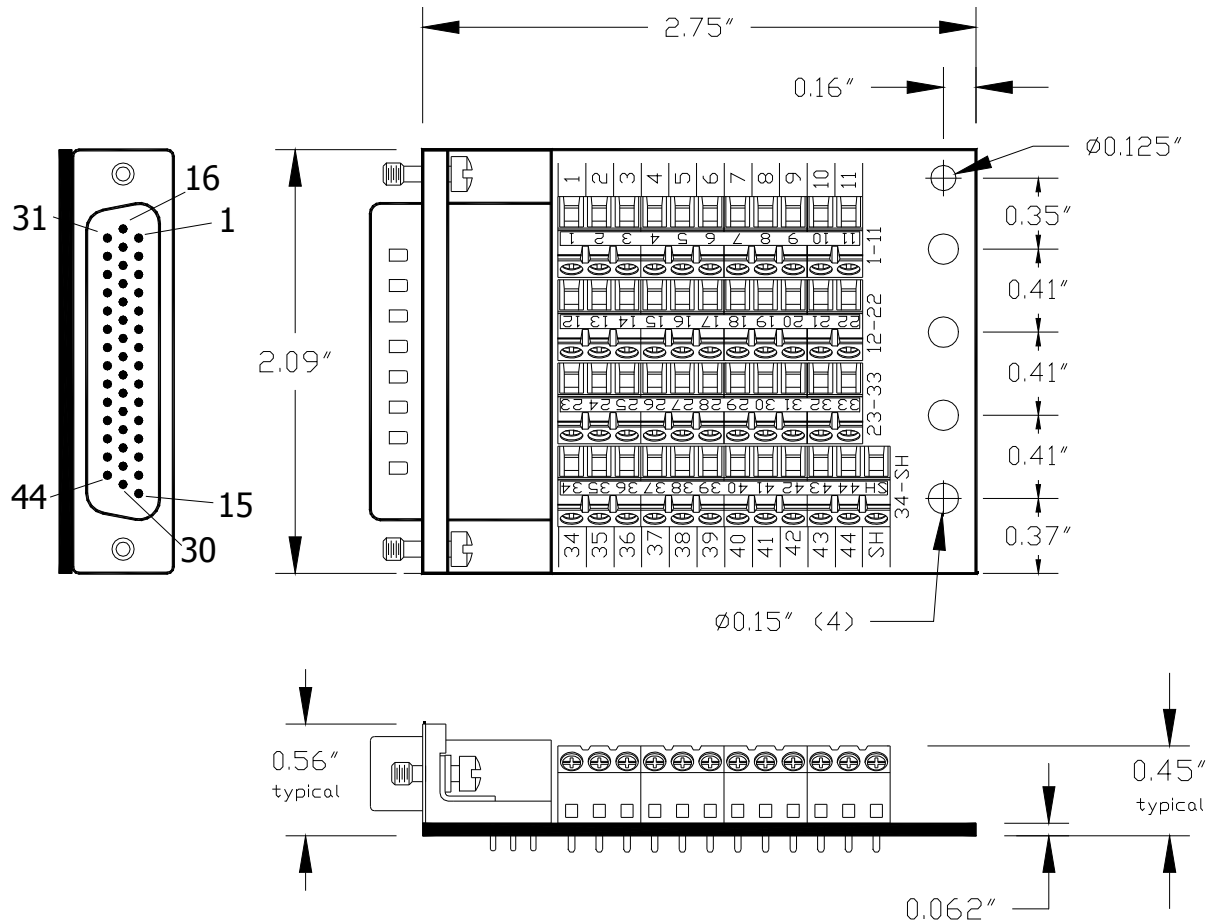

### BRKSD44HDMV2 Rev A Specifications

Ambient Temperature	-20°C to 85°C
Ambient Humidity	10% to 90% RH, non-condensing
Voltage	200V maximum between any two signals
Continuous Current	2.25A maximum on any signal
Screw Terminal Size	Accepts 16 - 26 AWG wire

## Part Number Ordering Information

BRKSD				-	
	1	2	3		4

### 1. Connector Positions

- **9** DB9
- **15** DB15
- **15HD** DB15 High Density
- **25** DB25
- **26HD** DB26 High Density
- **37** DB37
- **44HD** DB44 High Density

### 2. Connector Gender


- **M** Male (Plug)
- **F** Female (Socket)

### 3. Product Version


- $V_n$  or blank, depending on product

### 4. Connector Style and Hardware

- **C** Right Angle with Captive Male Screws
- **R** Right Angle with Jack Screws



**Captive Screws**



**Jack Screws**

## BRKSD44HDMV2 Stocked Part Numbers

The following part numbers represent standard options and are stocked:

- BRKSD44HDMV2-C
- BRKSD44HDMV2-R

For parts other than BRKSD44HDMV2-\*, please see the other datasheets for a list of stocked part numbers.

## **Changes**

V2, Rev A

- Increased overall length from 2.6" to 2.75" for better manufacturability and increased clearance around cable tie / mounting holes
- Added dividing lines for PCB silkscreen numbers by screw terminals

## **Notice**

Winford Engineering, LLC does not authorize any of its products for use in military, medical or other life-critical systems and/or devices. Life-critical devices/systems include devices or systems which, a) are intended for surgical implantation into the body, or b) support or sustain life and whose failure to perform can be reasonably expected to result in injury. Winford Engineering, LLC products are not designed with the components required, and are not subject to the testing required to ensure a level of reliability suitable for the treatment and diagnosis of people. Winford Engineering, LLC shall not be held responsible or liable for damages or injury that occur as a result of the use of this product.