

2JF0202P

2.4/5.0/6.0 GHz ISM Flexible Polymer

Key Features

2.4/5.0/6.0 GHz ISM

- 2410-2490 MHz

- 4920-7125 MHz

Embedded Antenna

WIFI 6E / WIFI 7 Antenna


High Performance

Ground Plane Independent

Self-Adhesive

Dimensions 30 × 30 × 0.2 mm

Customizable Cable and Connector

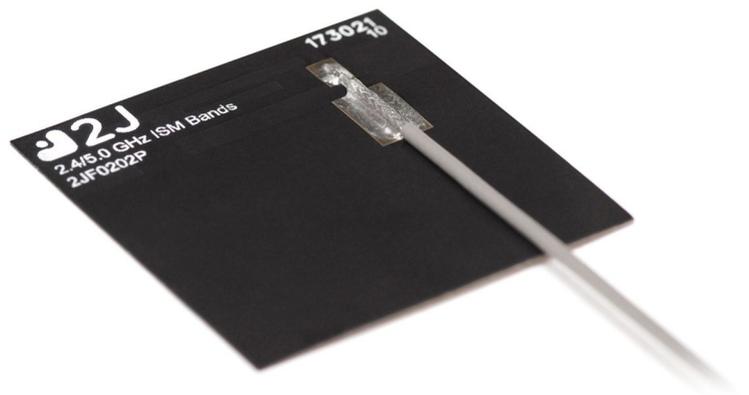

1. Antenna and electrical specifications

Parameters	2.4/5.0/6.0 GHz ISM Antenna		
Standards	WiFi 6E, BT, ZigBee, ISM, SigFox, LoRa		
Band (MHz)	2.4 GHz	5.0 GHz	6.0 GHz
Frequency (MHz)	2410-2490	4920-5925	5925-7125
Return Loss (dB)	~-20.2	~-14.8	~-15.2
VSWR	~1.2:1	~1.5:1	~1.8:1
Efficiency (%)	~76.3	~74.7	~61.0
Peak Gain (dBi)	~4.4	~6.7	~5.0
Average Gain (dB)	~-1.2	~-1.3	~-1.4
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	Most RF Connectors (U.FL Standard)		
Cable Length	Any Cable Length (100mm Standard)		
Cable Type	Other Cables Available (1.37mm Standard)		

Antenna Measurement Conditions:

Mounted 30x30x0.25 cm ABS Plate



100 mm of 1.37 mm Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2JF0202P
Mounting Type	Self-Adhesive
Dimensions (mm)	30 × 30 × 0.2
Material	Flexible Polymer
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

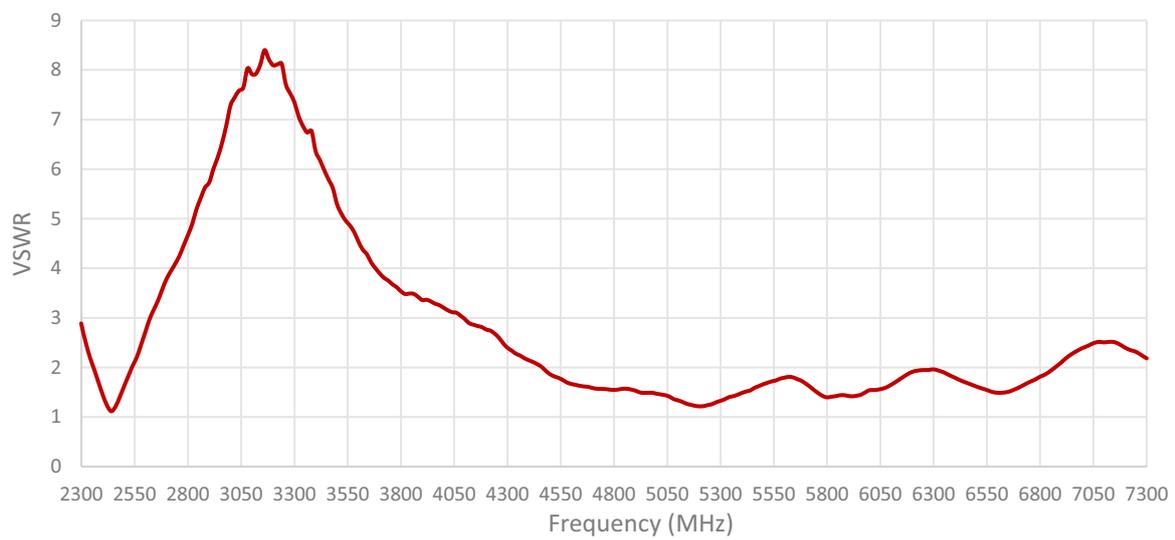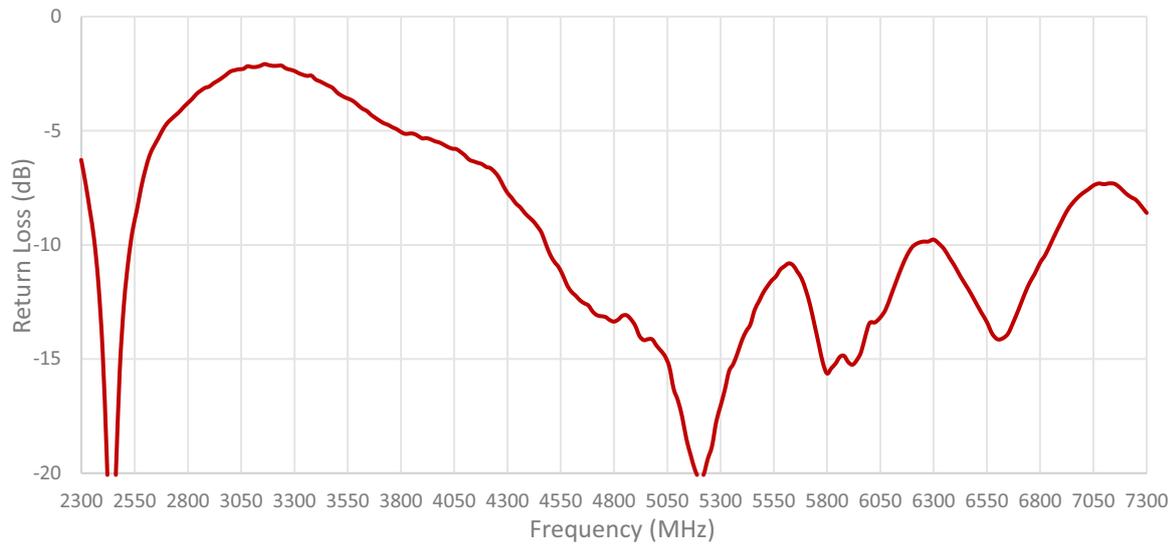

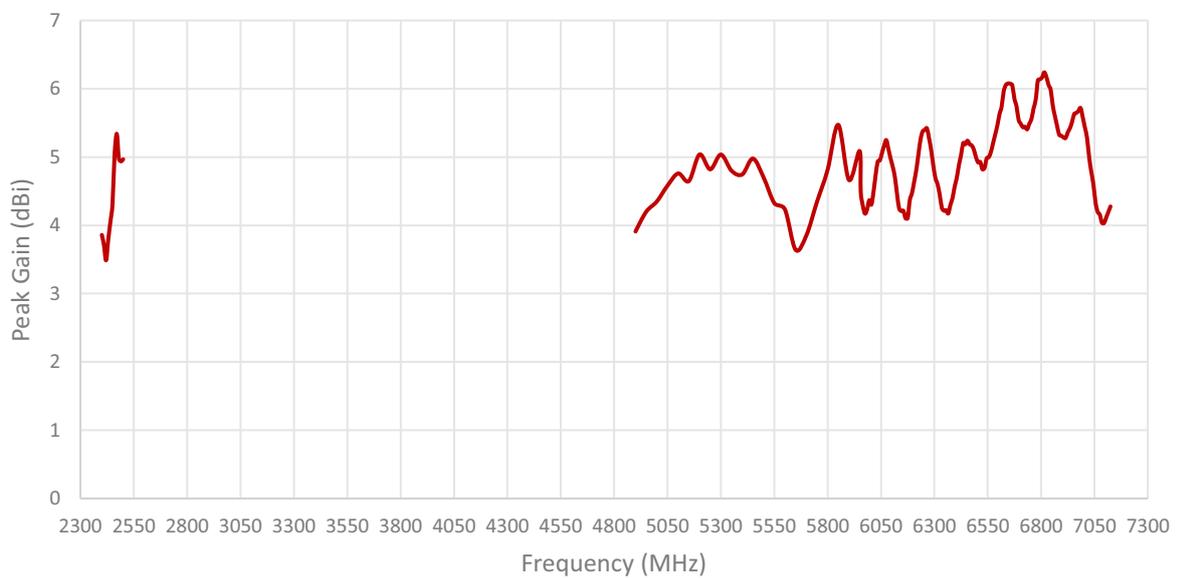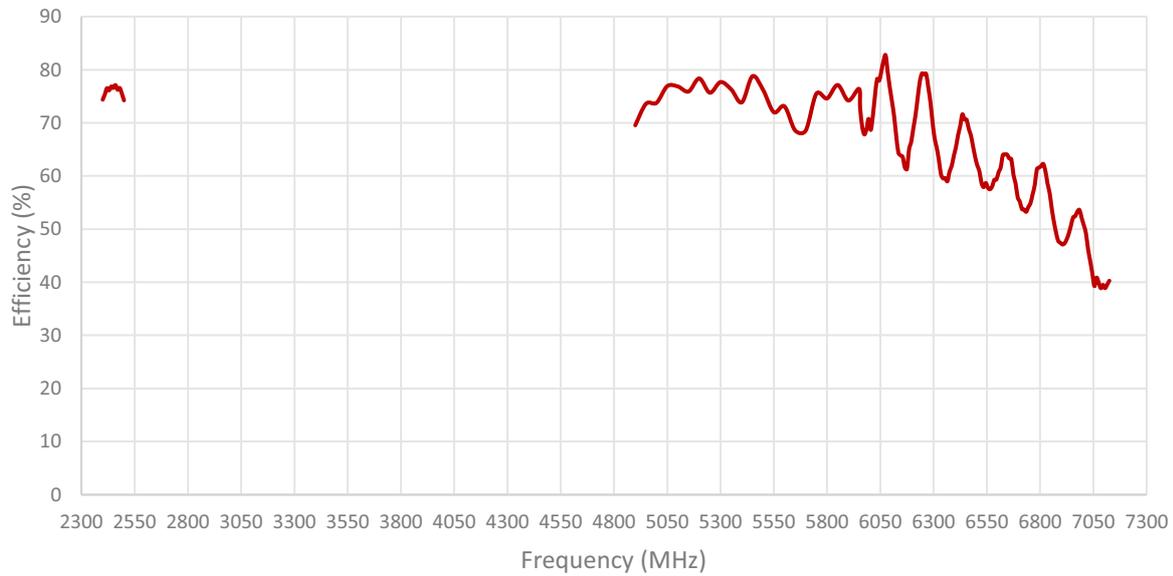


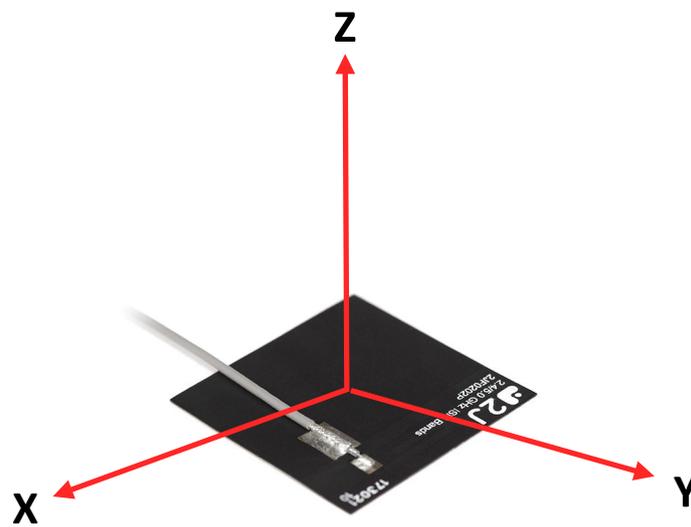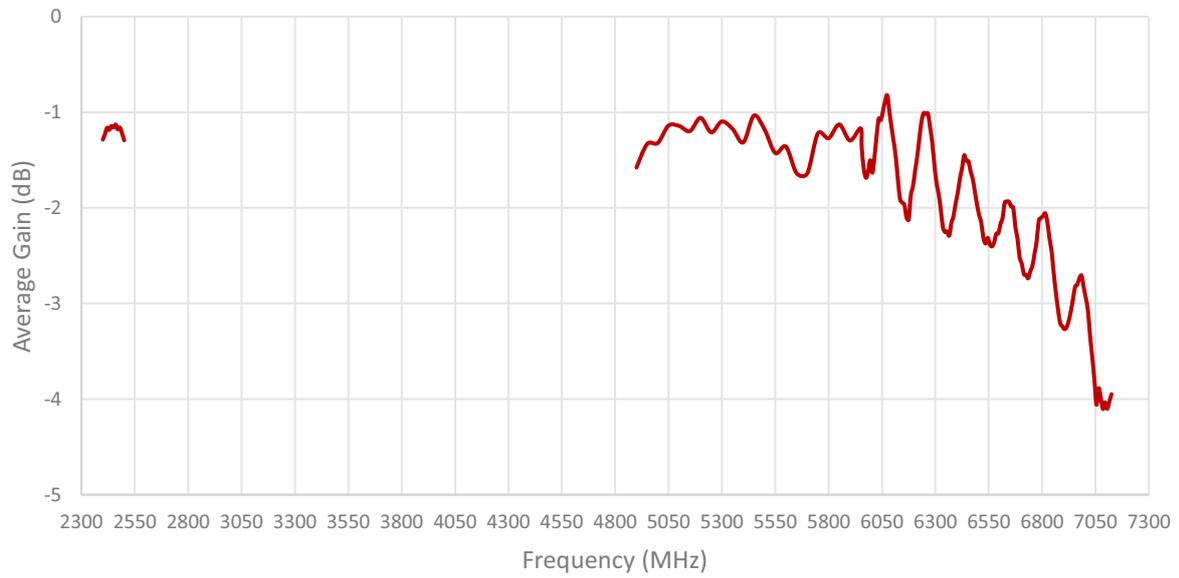

Radiation pattern reference

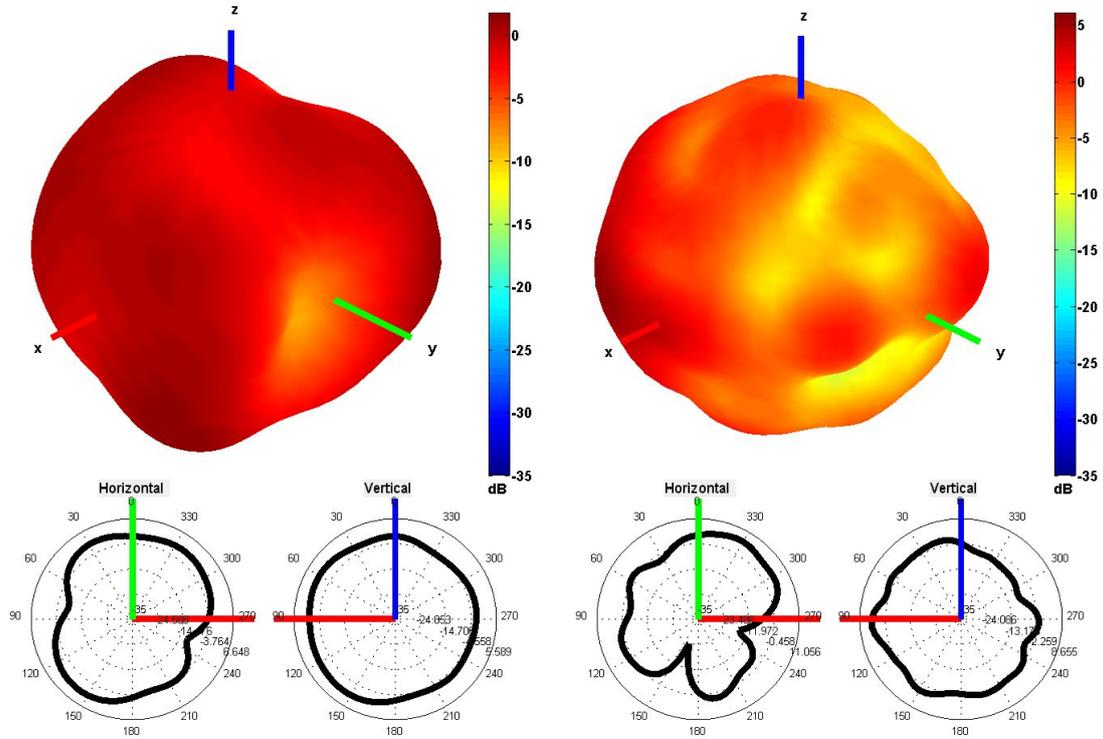


2450 and 5500 MHz Radiation pattern

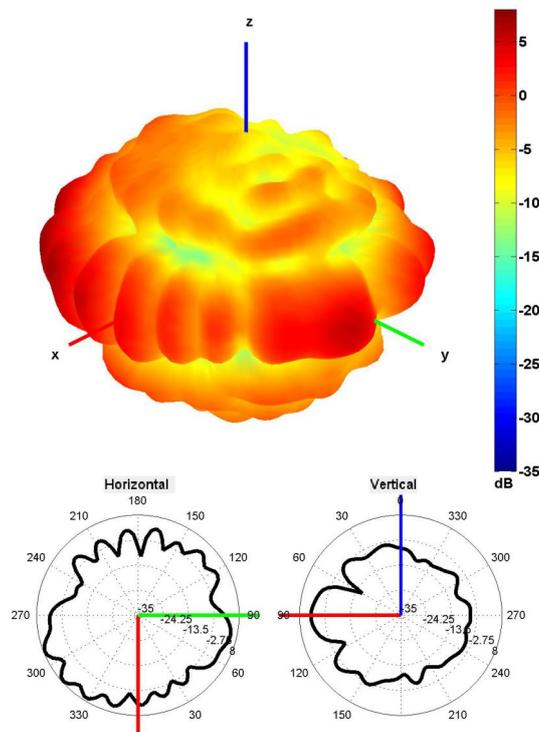

6500 MHz Radiation pattern

4. Antenna drawings

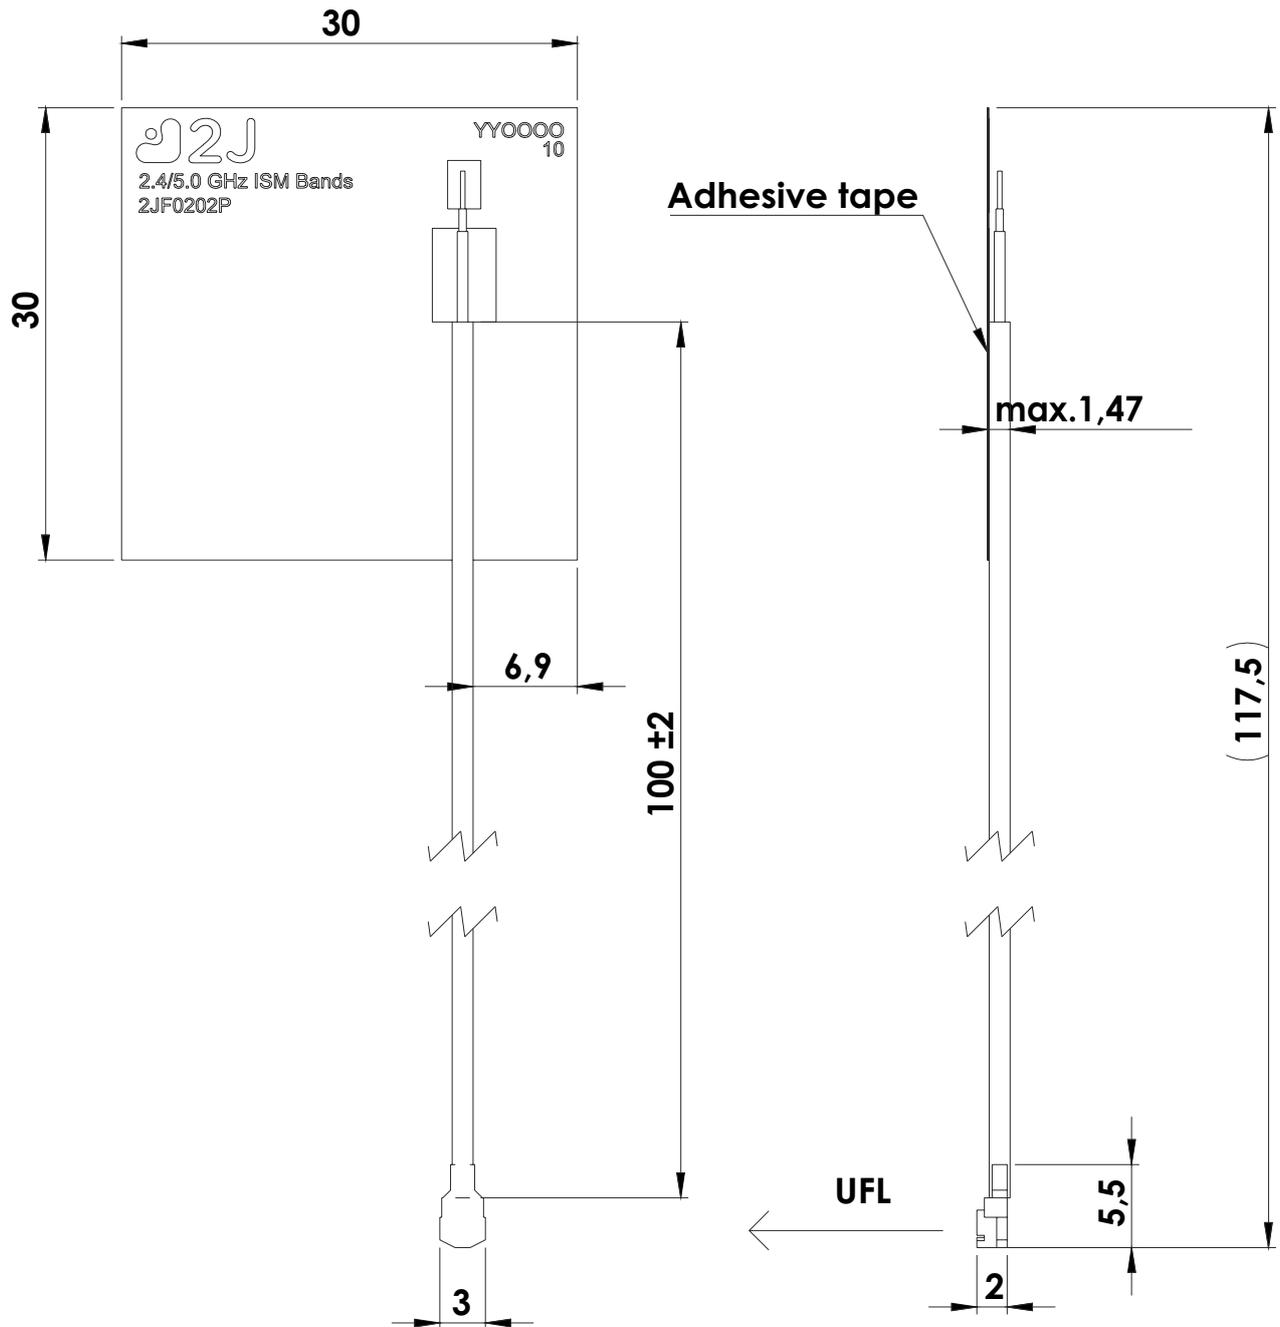

5. Antenna Images

